


## User and Reference Manual

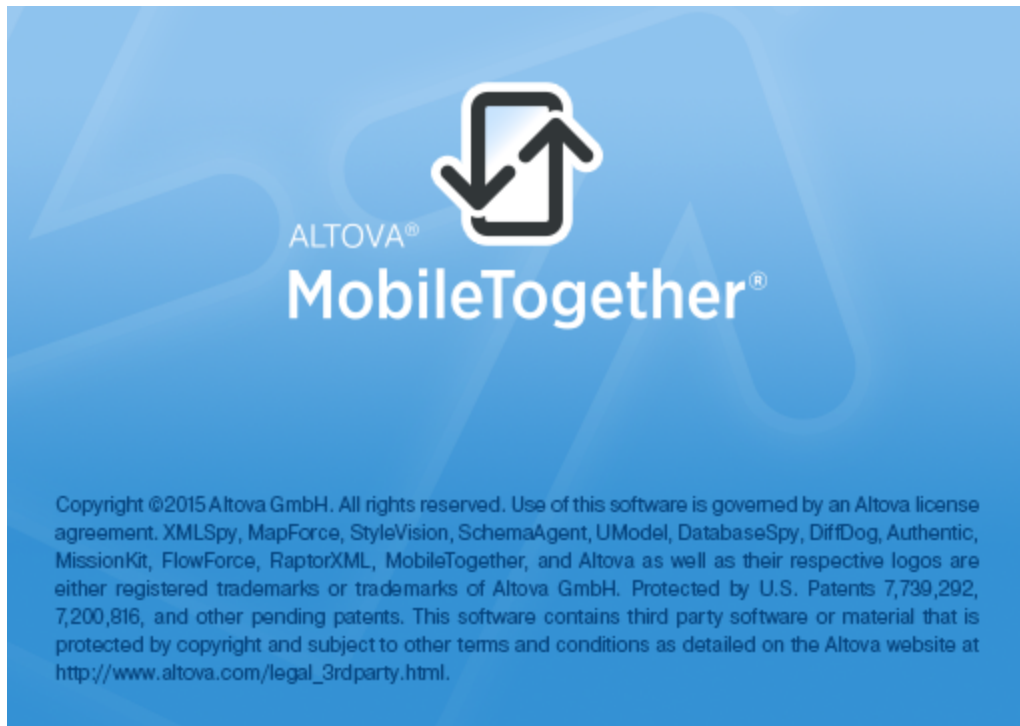

# **MobileTogether Client User & Reference Manual**

All rights reserved. No parts of this work may be reproduced in any form or by any means - graphic, electronic, or mechanical, including photocopying, recording, taping, or information storage and retrieval systems - without the written permission of the publisher.

Products that are referred to in this document may be either trademarks and/or registered trademarks of the respective owners. The publisher and the author make no claim to these trademarks.

While every precaution has been taken in the preparation of this document, the publisher and the author assume no responsibility for errors or omissions, or for damages resulting from the use of information contained in this document or from the use of programs and source code that may accompany it. In no event shall the publisher and the author be liable for any loss of profit or any other commercial damage caused or alleged to have been caused directly or indirectly by this document.

Published: 2015

© 2015 Altova GmbH

---

# Table of Contents

<b>1</b>	<b>Altova MobileTogether</b>	<b>3</b>
	<b>Index</b>	<b>0</b>



# **Chapter 1**

---

## **Altova MobileTogether**



# 1 Altova MobileTogether

## For Web Client

[Log in to MobileTogether Server](#)

[Run a solution](#)

[MobileTogether-protocol in email applications](#)

---

## Log in to MobileTogether Server

1. Open a web browser.
2. In the browser's address bar, enter the address of the MobileTogether Server to which you wish to connect and the port that has been configured as the server's mobile client port. For example, if you are connecting to a MobileTogether Server on your own machine and that server is using the default client port settings, enter: `localhost:8083` in the address bar of your browser.
3. Sign in directly with the user name and password that has been assigned to you by your MobileTogether Server administrator. If you have not been assigned one, then use `anonymous` as your user name; no password is required for `anonymous`.
4. A successful login takes you to the root container (`Container /`), which contains all the solutions deployed to that server.

## [Table of Contents](#)

---

## Run a solution

1. After logging in to MobileTogether Server, navigate to the solution you want to run.
2. Run the solution by clicking/tapping the solution's link in its *Run in Browser* column.
3. If a solution was run previously and had data saved, then the **Clear Saved Data** button is displayed for that solution. If you wish to run the solution with the original unchanged data, then click/tap **Clear Saved Data**. If you do not clear saved data, then the solution will start with the data that has been previously saved.
4. After you have finished, log out by clicking/tapping **Log out** at the top right of the screen.

**Note:** Data that is saved on the web client is saved in the local storage (aka web storage) of your browser. HTML 5.0 local storage is supported in the following browsers:

IE 8.0 +	Firefox 3.5+	Safari 4.0+	Chrome 4.0+	Opera 10.5+	iPhone 2.0+	Android 2.0+
-------------	-----------------	----------------	----------------	----------------	----------------	-----------------

## [Table of Contents](#)

---

**MobileTogether-protocol in email applications**

At the time of writing (October 2015), links that use the `mobiletogether://` protocol do not work in Gmail and some other email applications, but they work perfectly in popular email applications such as AquaMail, K9, and MailWise. They have been tested in AquaMail and K9, and work correctly in these applications. The `mobiletogether://` protocol is used for MobileTogether-specific tasks such as opening a MobileTogether solution via the link or updating the server settings on your client device via the link.

[Table of Contents](#)

---

*Last updated: 09 November 2015*